


Ultrasonic Homogenzier|Processor|Sonicator-1500W

Model No.: BEM-1500A

(Touch Screen Version)

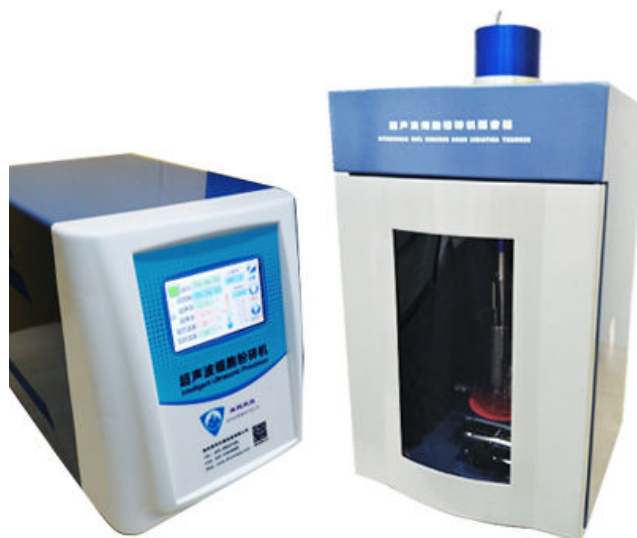

Application

The instrument is widely used in the fields of biology, microbiology, physics, zoology, agronomy, pharmacy, petroleum, etc. Also suitable for sample preparation in the chemical, medical, archaeological, address, marine and other fields.


It also can be used in Nanotechnology research such as the dispersion of nanomaterials (nanotubes, graphene, silica, etc.); emulsification, homogenization and fragmentation of nano-materials such as carbon nanotubes, graphene and other materials, homogeneous soil, rock samples, non-ferrous metals, rare earths and other particles. Lysis, disruption, leaching, extraction of DNA, protein extraction from animal and plant cells, pruning DNA/RNA, chromatin immunoprecipitation technology for cells, viruses, spores and other cell structures.

Product Description

The Ultrasonic Homogenizer/Sonicator/Liquid Processor (Touch Screen Control) which used 4.3 TFT touch control and upgraded the password protection system, is a multifunctional and multipurpose instrument for ultrasonic processing by cavitation in liquid material. It can be used for a variety of plants and animals, bacteria, viruses, cells and the organization of broken, at the same time can be used to emulsify, separation, scattered, cracking, homogenization, extraction, defoaming, cleaning, nanometer material preparation, graphene dispersion and chemical reactions, etc.

Product Features

1. Large TFT screen Display, **Touch control** for new version
2. **Login Password Protection System** for data security
3. 20 groups of experimental **data can be set and stored**, safe and convenient.
4. The ultrasonic **power can be adjusted** continuously, and the best experimental conditions can be explored.
5. The program has over-temperature/delay/fault protection settings and **alarm system**, which can protect the test samples to the maximum extent.
6. High and Low temperature bath is optional which can control the temperature between -40 to 200°C
7. RS232 Interface is optional, which can support the data transmission between the PC and PLC to realize the remote control.
8. We provide the **Sound-proof Chamber** for standard configuration with perfect transportation.

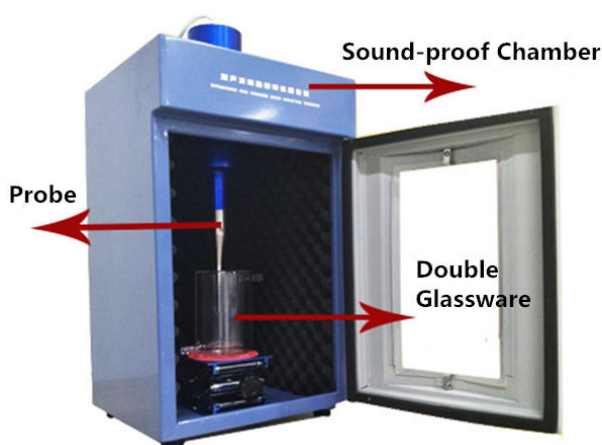

Technical Specification

Model	BEM-1500A
Frequency (KHz)	19-21
Power(Watt)	10-1500
Processing Capacity (ml)	20-1000
Input &Display (4.3in TFT)	Touch Control
Login Password	Yes
Standard Probe (mm)	Φ22
Optional Probes (mm)	Φ10、15、20、25
Sample Temperature Protection (℃)	0-100
Security System	Self-diagnosis function, automatic error correction, overload, overtemperature protection ,etc.

Probe Options



Model	Inch	Frequency	Power Range	Crushing Capacity
Φ2	1/12"	20-25KHz	min-150W	0.2-5ml
Φ3	1/8"	20-25KHz	min-250W	3-10ml
Φ6	1/4"	20-25KHz	20-400W	10-100ml
Φ10	5/12"	20-25KHz	100-600W	30-300ml
Φ12	1/2"	20-25KHz	200-900W	50-500ml
Φ15	5/8"	20-25KHz	300-1000W	100-600ml
Φ20	4/5"	19.5-20.5KHz	400-1100W	100-1000ml
Φ22	5/6"	19.5-20.5KHz	400-1100W	200-1000ml
Φ25	1"	19.5-20.5KHz	800-1500W	500-1200ml